
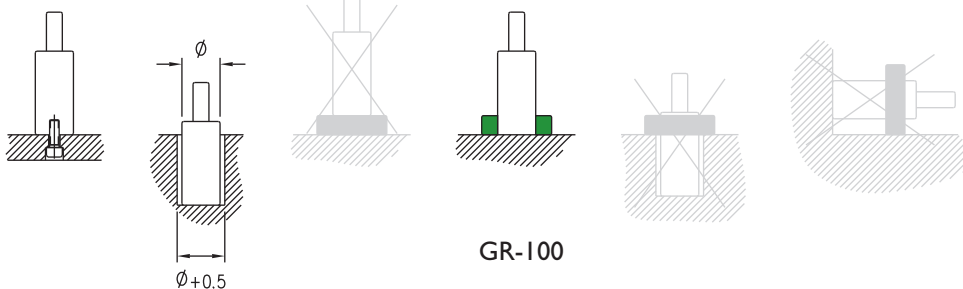


Dimensiones
Dimensions
Massgängen
Dimensions
Dimensioni
Medidas

	C	L	A	
	mm	mm	mm	
A-100-10	10	74	64	0,11
A-100-13	12,7	79,4	66,7	0,11
A-100-16	16	86	70	0,12
A-100-25	25	104	79	0,13
A-100-38	38	130	92	0,15
A-100-50	50	154	104	0,16
A-100-63	63	180	117	0,18
A-100-80	80	214	134	0,21

Consultar carreras fuera de catálogo / Other strokes can be produced on request

Ejemplo de pedido / Ordering example:

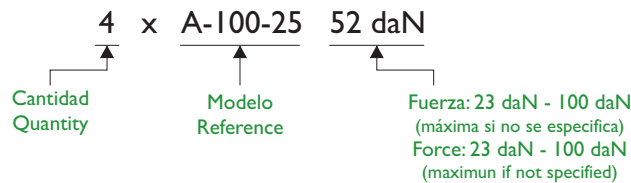

Max. Recomend. 1,6 m/s
20°C 68°F
40-100 golpes/min
40-100 strokes/min

10% min

N₂






Max 88bar 1276psi Min 20bar 290psi

Max 80°C 176°F Min 0°C 32°F

> 80°C (176°F) → Kit Viton

+1°C / +1,8°F +0,34%

Repair Kit
KIT A-100_I

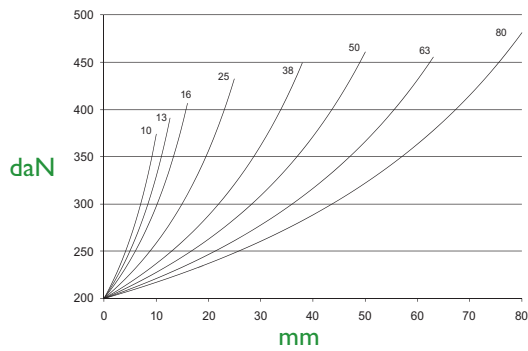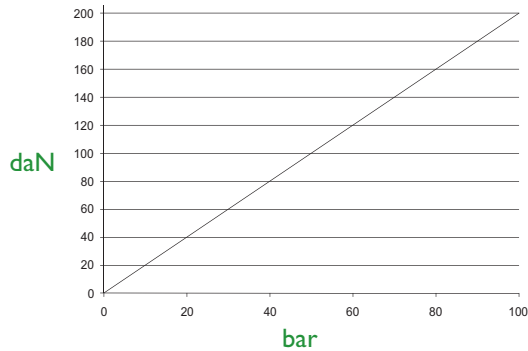
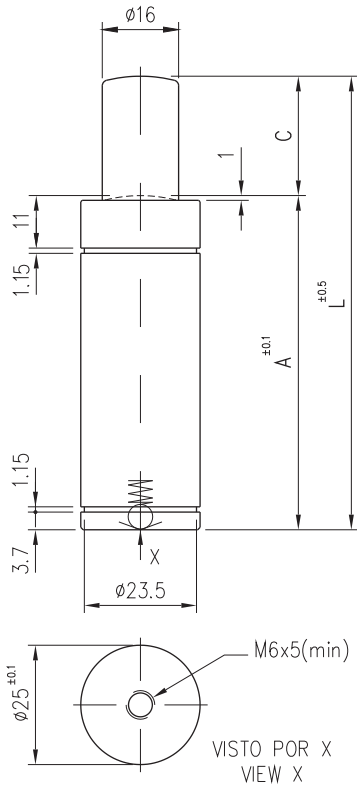


Dimensiones
Dimensions
Massgängen
Dimensions
Dimensioni
Medidas

	C	L	A	
	mm	mm	mm	
A-200-10	10	65	55	0,15
A-200-13	12,7	70,4	57,7	0,15
A-200-16	16	77	61	0,16
A-200-25	25	95	70	0,18
A-200-38	38	121,2	83,2	0,20
A-200-50	50	145	95	0,23
A-200-63	63	172	109	0,26
A-200-80	80	205	125	0,31

Consultar carreras fuera de catálogo / Other strokes can be produced on request

Ejemplo de pedido / Ordering example:

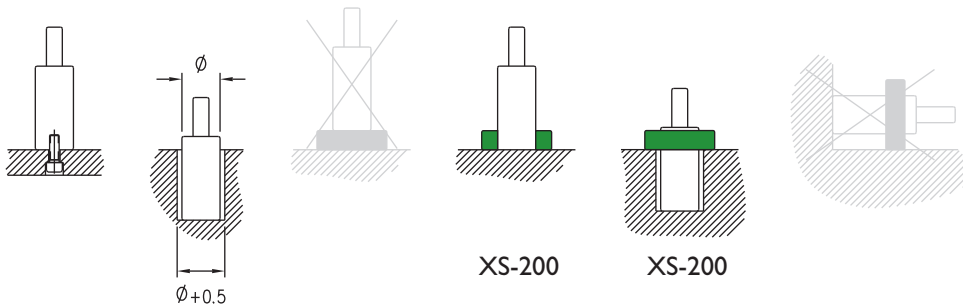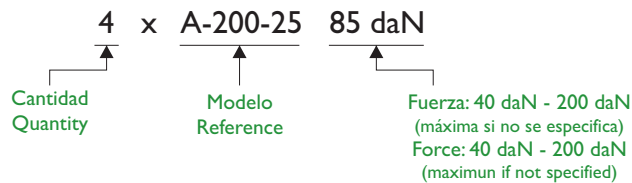

Max. Recomend. 1,6 m/s
20°C 68°F
40-100 golpes/min
40-100 strokes/min

15% min

N₂

Max 100bar 1450psi Min 20bar 290psi

Max 80°C 176°F Min 0°C 32°F

> 80°C (176°F) → Kit Viton

+1°C / +1,8°F +0,34%

Repair Kit
KIT A-200_I