


# INSEKSRUV MC6S 12.9

## Typ ISO 4762, DIN 912, SMS 2166

Hållfasthetsklass: 12.9

Min 1220 N/mm<sup>2</sup>

Beställningsexempel: 1800 M03 006

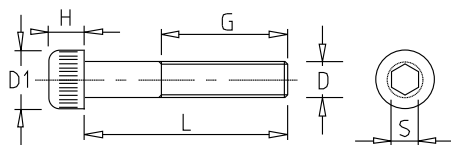


G	18	20	22	24	28	32	36	44	52
D1	5,5	7	8,5	10	13	16	18	24	30
H	3	4	5	6	8	10	12	16	20
S	2,5	3	4	5	6	8	10	14	17
D	M3	M4	M5	M6	M8	M10	M12	M16	M20
L									
6	x	x	x						
8	x	x	x	x					
10	x	x	x	x	x				
12	x	x	x	x	x				
14	x	x	x	x	x				
16	x	x	x	x	x	x			
18	x	x	x	x	x	x			
20	x	x	x	x	x	x	x		
25	x	x	x	x	x	x	x	x	
30	x	x	x	x	x	x	x	x	
35	x	x	x	x	x	x	x	x	
40		x	x	x	x	x	x	x	x
45			x	x	x	x	x	x	x
50			x	x	x	x	x	x	x
55			x	x	x	x	x	x	x
60			x	x	x	x	x	x	x
70			x	x	x	x	x	x	x
80				x	x	x	x	x	x
90				x	x	x	x	x	x
100				x	x	x	x	x	x
110					x	x	x	x	x
120					x	x	x	x	x
130					x	x	x	x	x
140					x	x	x	x	x
150					x	x	x	x	x
160					x	x	x	x	x
180					x	x	x	x	x
200							x	x	x
220							x	x	x

Längder ovanför tonat område anger helgängat utförande.  
Övriga dimensioner efter förfrågan.

**SKRUV**  
 med försänkt huvud 90° och  
 6-kantshål. MF6S,  
 DIN 7991 svart  
 Hållfasthetsklass: 10.9

Beställningsexempel: 1801 M03 006

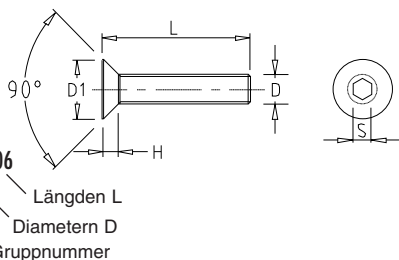


D1	6	8	10	12	16	20	24	30
H	1,7	2,3	2,8	3,3	4,4	5,5	6,5	7,5
S	2	2,5	3	4	5	6	8	10
D	M3	M4	M5	M6	M8	M10	M12	M16
L								
6	x							
8	x	x	x					
10	x	x	x	x				
12	x	x	x	x	x			
14	x	x	x	x	x			
16	x	x	x	x	x	x		
18	x	x	x	x	x	x		
20	x	x	x	x	x	x	x	
25	x	x	x	x	x	x	x	
30			x	x	x	x	x	x
35			x	x	x	x	x	x
40			x	x	x	x	x	x
45					x	x	x	x
50					x	x	x	x

Övriga dimensioner efter förfrågan.

# STOPPSKRUV P6SS

## DIN 913, ISO 4026, HRC 45

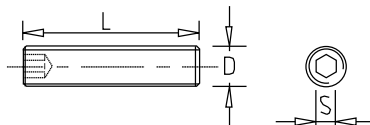

Beställningsexempel: 1802 M03 004

Längden L  
Diametern D  
Gruppnummer

D Insexhål S	M3 1,5	M4 2	M5 2,5	M6 3	M8 4	M10 5	M12 6	M16 8
L								
4	x							
6	x	x	x					
8	x	x	x	x				
10	x	x	x	x	x			
12	x	x	x	x	x	x		
16	x	x	x	x	x	x	x	
20		x	x	x	x	x	x	x
25		x	x	x	x	x	x	x
30				x	x	x	x	x
35				x	x	x	x	x
40					x	x	x	x
50						x	x	x

# PASSBULT 12.9

## DIN 610, ISO 7379


Tolerans: f9 och för längden L +0,25/-0 samt härdad

Beställningsexempel: 1500 M05 010

Längden L

Gängan D1

Gruppnummer

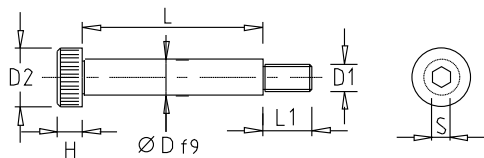

Hårdhet: 41-43 HRC

D	6	8	10	12	16	20
D1	M5	M6	M8	M10	M12	M16
D2	10	13	16	18	24	30
H	4,5	5,5	7	9	10	14
L1	9,5	11	13	16	18	22
S	3	4	5	6	8	10
<b>L +0,25/-0</b>						
10	x					
12	x	x				
16	x	x	x	x		
20	x	x	x	x		
25	x	x	x	x		
30	x	x	x	x	x	
40	x	x	x	x	x	x
50		x	x	x	x	x
60			x	x	x	x
70			x	x	x	x
80			x	x	x	x
90				x	x	x
100				x	x	x
120					x	x