


EG Upplyftare är laddade med nitrogen (N₂).
Laddtrycket kan varieras från 20 till 150 bar, vilket anges vid beställning.

Exempel: EG 16-10-40 ger laddtryck 40 bar.


Slutkraften är 1,6 x initialkraften.




| MODELL | C mm | L mm | d mm | F mm | D mm | M | daN | |
|---------|---------|---------|---------|---------|---------|---------|---------|---------|
| | | | | | | | 20 bar | 150 bar |
| EG16-10 | 10 | 70 | 6 | 40 | 14 | M16X1.5 | 6 | 42 |
| 20 | 20 | 80 | | | | | | |
| 30 | 30 | 90 | | | | | | |
| 40 | 40 | 100 | | | | | | |
| 50 | 50 | 110 | | | | | | |
| 60 | 60 | 120 | | | | | | |
| 70 | 70 | 130 | | | | | | |
| 80 | 80 | 140 | | | | | | |
| 100 | 100 | 160 | | | | | | |
| EG24-10 | 10 | 70 | | | | | | |
| 20 | 20 | 80 | | | | | | |
| 30 | 30 | 90 | | | | | | |
| 40 | 40 | 100 | | | | | | |
| 50 | 50 | 110 | | | | | | |
| 60 | 60 | 120 | | | | | | |
| 70 | 70 | 130 | | | | | | |
| 80 | 80 | 140 | | | | | | |
| 100 | 100 | 160 | | | | | | |

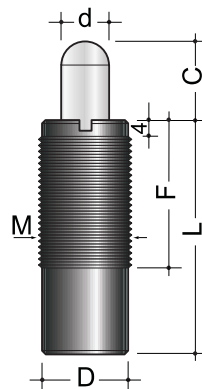

| MONTERINGSNYCKEL | |
|------------------|-----------------|
| BESTNR. | Passar storlek: |
| CH-12 | EM-12 |
| EG-CH-16 | EG-16 & EM-16 |
| EG-CH-24 | EG-24 & EM-24 |



| LÅSMUTTER | | | |
|-----------|---------|---------|----------|
| SERIE | M mm | S mm | CH mm |
| EG-D-16 | M16X1.5 | 8 | 22 |
| EG-D-24 | M24x1.5 | 10 | 32 |

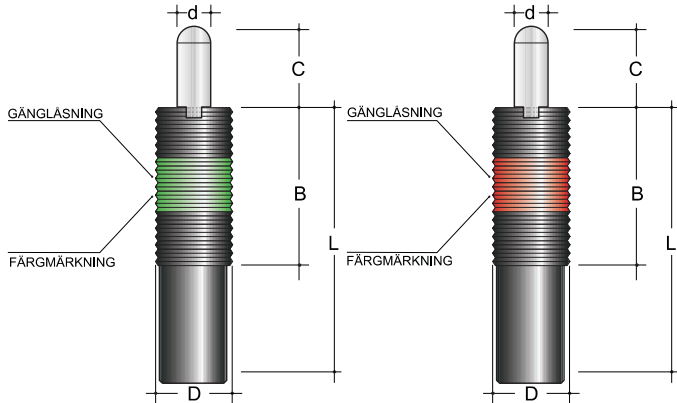

LITEN KRAFT

| MODELL | D | C mm | L mm | B mm | d mm | Initialkraft daN | Slutkraft daN | Monteringsnyckel |
|-----------|-----|------|------|------|------|------------------|---------------|------------------|
| EM 12-10G | M12 | 10 | 43 | 35 | 5.5 | 0.4 | 2 | 12 |
| EM 16-10G | M16 | 10 | 60 | 35 | 7.5 | 1.3 | 4 | 16 |
| 15G | | 15 | 60 | | | 1.0 | | |
| 20G | | 20 | 80 | | | 1.3 | | |
| 30G | | 30 | 125 | | | 1.8 | | |
| 40G | | 40 | 150 | | | 1.3 | | |
| 50G | 50 | 150 | 1.3 | | | | | |
| EM 24-15G | M24 | 15 | 60 | 45 | 10 | 2.0 | 10 | 24 |

STOR KRAFT

| MODELL | D | C mm | L mm | B mm | d mm | Initialkraft daN | Slutkraft daN | Monteringsnyckel |
|-----------|-----|------|------|------|------|------------------|---------------|------------------|
| EM 12-10R | M12 | 10 | 43 | 35 | 5.5 | 0.7 | 4 | 12 |
| EM 16-10R | M16 | 10 | 60 | 35 | 7.5 | 2.7 | 8 | 16 |
| 15R | | 15 | 60 | | | 1.5 | | |
| 20R | | 20 | 80 | | | 1.7 | | |
| 30R | | 30 | 125 | | | 2.0 | | |
| 40R | | 40 | 150 | | | 2.6 | | |
| 50R | 50 | 150 | 2.6 | | | | | |
| EM 24-15R | M24 | 15 | 60 | 45 | 10 | 4.0 | 20 | 24 |